





S AND C TYPE STEEL AGRICULTURAL CHAIN

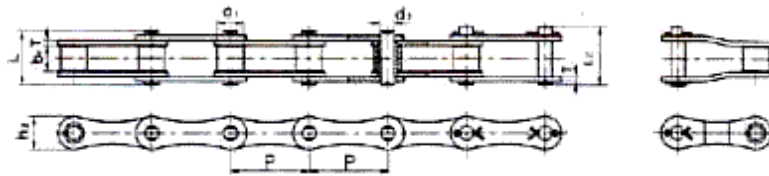

CHAIN NO.	PITCH	ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH		INNER PLATE DEPTH	PLATE THICKNESS	ULTIMATE TENSILE STRENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P mm	d1 max mm	b1 max mm	d2 max mm	L max	LC max mm	h2 max mm	T max mm	Q min kN	QO kN	q kg/m
S32	29.21	11.43	15.88	4.45	26.7	28.8	13.2	1.8	8.0	21.6	0.86
S42	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.8	27.0	50.8	1.60
S45	41.40	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0	36.1	1.66
S52	38.10	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0	36.1	1.68
S55	41.40	17.78	22.23	5.72	37.7	40.4	17.3	2.8	18.0	36.1	1.80
SS55R	41.40	17.78	22.23	8.90	41.0	44.0	22.4	3.5	45.0	73.1	2.49
S62	41.91	19.05	25.40	5.72	40.3	43.0	17.3	2.5	27.0	36.1	1.87
S77	58.34	18.26	22.23	8.90	43.2	46.4	26.2	4.0	45.0	73.1	2.65
S88	66.27	22.86	28.58	8.90	49.8	53.0	26.2	4.0	45.0	73.1	3.25
CA650	50.80	25.00	27.80	9.53	40.4	44.7	25.0	4.0	80.0	95.5	3.49

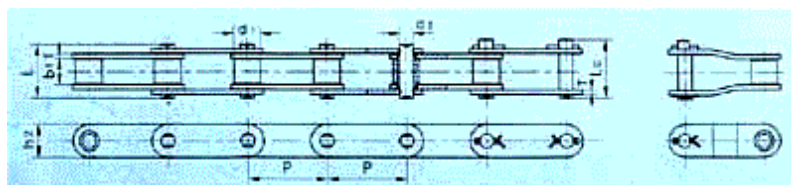

CHAIN NO.	PITCH	ROLLER DIAMETER	WIDTH BETWEEN INNER PLATES	PIN DIAMETER	PIN LENGTH		INNER PLATE DEPTH	PLATE THICKNESS	ULTIMATE TENSILE STRENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	T max mm	Q min kN	QO kN	q kg/m
CA550	41.40	16.87	19.81	7.19	35.00	38.00	19.30	2.80	39.10	51.2	1.94
CA555	41.40	16.87	12.70	7.19	29.70	33.10	19.30	3.10	39.10	56.0	1.83
CA557	41.40	17.78	20.24	8.00	37.40	40.60	23.10	3.10	55.61	74.3	2.20
CA620	42.01	17.91	24.51	7.19	41.80	45.20	20.20	3.25	39.10	55.1	2.35
CA2060H	38.10	11.91	12.70	5.94	29.74	31.72	17.45	3.25	31.28	40.5	1.50
CA2063	38.10	1.89	12.70	5.94	29.40	34.20	19.30	3.25	31.28	40.5	1.65

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,

FORT, MUMBAI-400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com